

Habiis

HB7




4-axle covered sliding-wall wagon with buffers

4-achsiger gedeckter Großraum-Schiebewandwagen

	A	B	C	
S	36,5 t	44,5 t	52,5 t	**
120	00,0 t			


Gauge Profil	G1
Overall length over buffers Wagenlänge über Puffer	23.240 mm
Loading length Ladelänge	21.980 mm
Loading width Ladebreite	2.770 mm
Loading area in m² Ladefläche in m ²	61 m²
Loading volume (cube) in m³ Laderaum in m ³	163 m³
Tare weight Eigengewicht	ca. 27.500 kg

Maximum floor pressure allowed Zulässige Fußbodenbelastung	30 kN
Floor height above top of rail Fußbodenhöhe über Schienenoberkante	1.200 mm
Minimum curve radius Kleinster befahrbarer Gleisbogenhalbmesser	35 m
Number of sliding walls Anzahl Schiebewände/Wagenseite	2
Access height when sliding doors fully opened/retracted Schiebewandöffnung – Höhe	2.780 mm
Access width when sliding doors fully opened/retracted Schiebewandöffnung – Breite	10.817 mm
Number of Europallets (800 × 1200 mm) Anzahl EUR-Paletten (800 × 1200 mm)	54 units
Number of Industrial Pallets (1000 × 1200 mm) Anzahl IND-Paletten (1000 × 1200 mm)	42 units
Securing rings (lateral) Verzurrösen (seitlich)	24 units

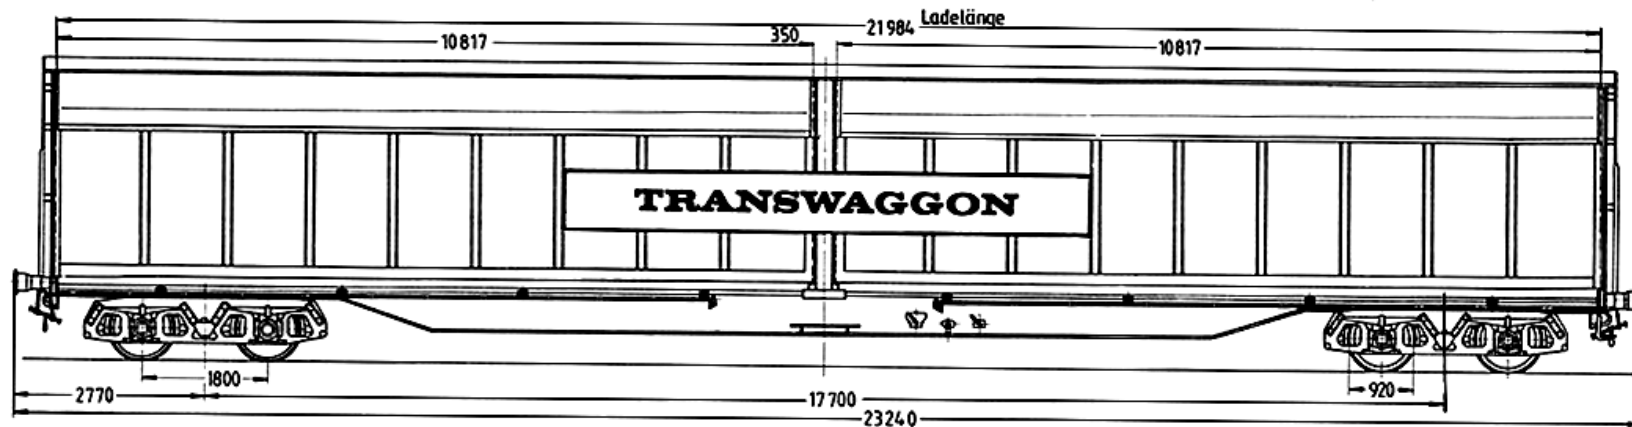



Maximum use of pallet space / Palettenstellplätze

54 EUR pallets (800×1200 mm)



42 IND pallets (1000×1200 mm)



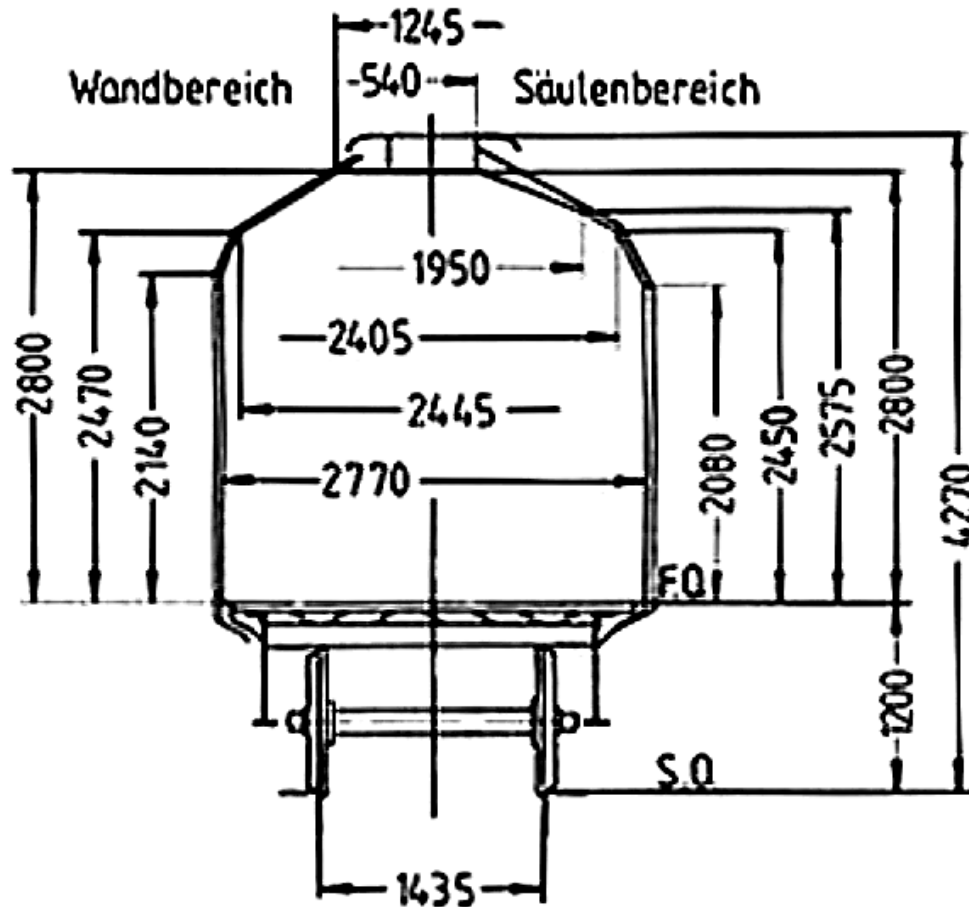

Height above floor Höhe über Fußboden	Loading width Vorhandene Ladebreite	
	wall area Wandbereich	portal area Portalbereich
2080	2770	2770
2100	2770	2750
2140	2770	2711
2150	2760	2701
2200	2711	2651
2250	2662	2602
2300	2612	2553
2350	2563	2503
2400	2514	2454
2450	2464	2405
2470	2445	2332
2500	2336	2223
2550	2154	2041
2575	2063	1950
2600	1972	1793
2650	1790	1480
2700	1608	1166
2750	1427	853
2780	1245	540