

# Laads

NLA1




**Flat wagon unit with straight floor and scotch blocks**

Flachwageneinheit mit geradem Fußboden und Radvorlegern


	A	B	C	D	
S	37,5 t	45,5 t	53,5 t	53,5 t	**
120	00,0 t				

<b>Gauge Profil</b>	<b>G1</b>
<b>Type of brake block</b> LL-brake block, cast-iron (GG) brake block	<b>LL/GG</b>
<b>Sohlenart</b> LL-Sohle (low noise, low friction), GG-Sohle (Grauguss)	
<b>Overall length over buffers</b> Wagenlänge über Puffer	<b>27.000 mm</b>
<b>Loading length</b> Ladelänge	<b>25.760 mm</b>
<b>Loading width</b> Ladebreite	<b>2.512 mm</b>
<b>Loading width between fixing rail/loading edge</b> Ladebreite zwischen Radvorleger-Schienen/Ladekante	<b>2.512 mm</b>

<b>Tare weight</b> Eigengewicht	<b>ca. 26.500 kg</b>
<b>Floor height above top of rail</b> Fußbodenhöhe über Schienenoberkante	<b>1.200 mm</b>
<b>Minimum curve radius</b> Kleinster befahrbarer Gleisbogenhalbmesser	<b>75 m</b>
<b>Guardrail</b> Absturzsicherung	<b>yes</b>
<b>Extra information per half wagon</b> Zusatzdaten je Wagenhälfte	
<b>Number of scotch blocks</b> Anzahl Radvorleger	<b>16 units</b>
<b>Load capacity</b> Tragfähigkeit	<b>ca. 26,75 t</b>

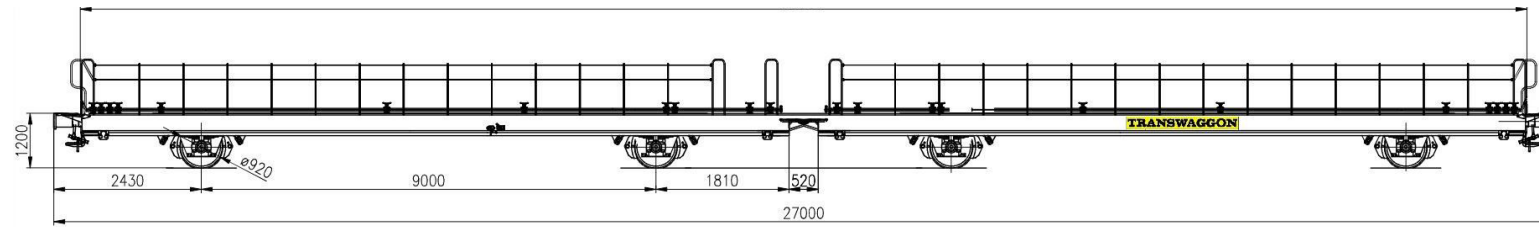

B

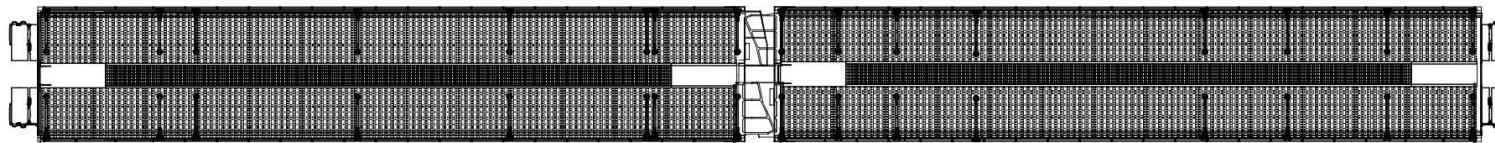

B-I

